


TRIPLE MAXIFILL SEED & SUPER UNIT

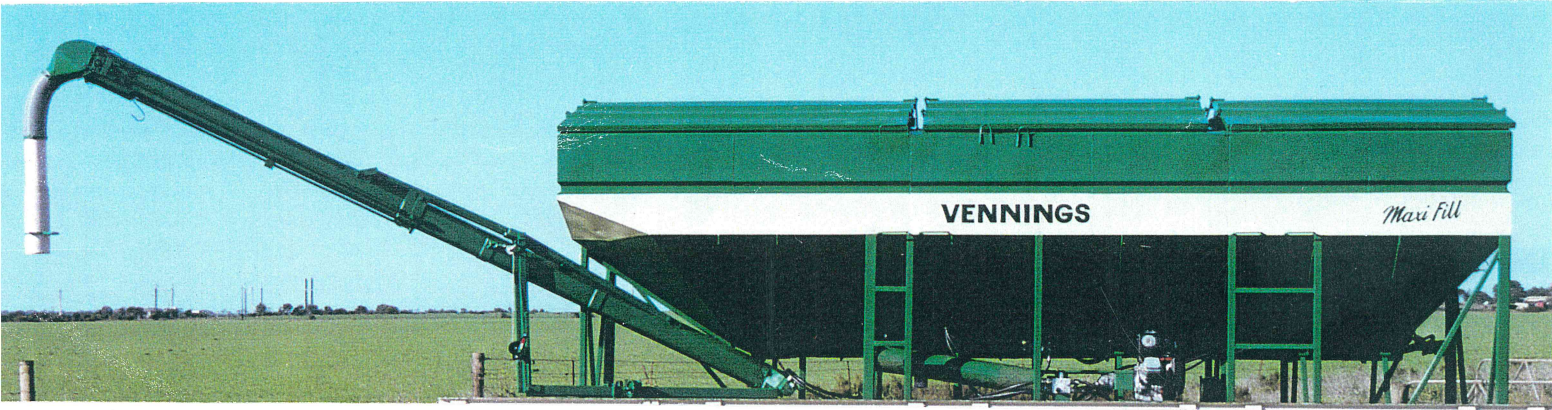


Fast and efficient loader for air seeders and combines, 40' widelines can be filled from one position.

Patented swivelling and folding, u shaped elevating belt. Able to handle all types of seed and fertiliser without cracking or damage. Bins completely self emptying. Super and Urea bins have separate simple hinged bottom door to allow cleaning and maintenance of cross auger.

Two electric actuators operate seed and super doors by a hand held control box with a 14' 6" (4500mm) reach. Hydraulic operated rams open and shut cut off doors inside of both super and urea bins which are again operated from the same control box.

Simple, efficient direct coupled hydraulic motor drives unit. Fitted with a 13 H/P Vanguard Electric start motor. Optional motors are available. Three separate waterproof lids avoid product contamination.

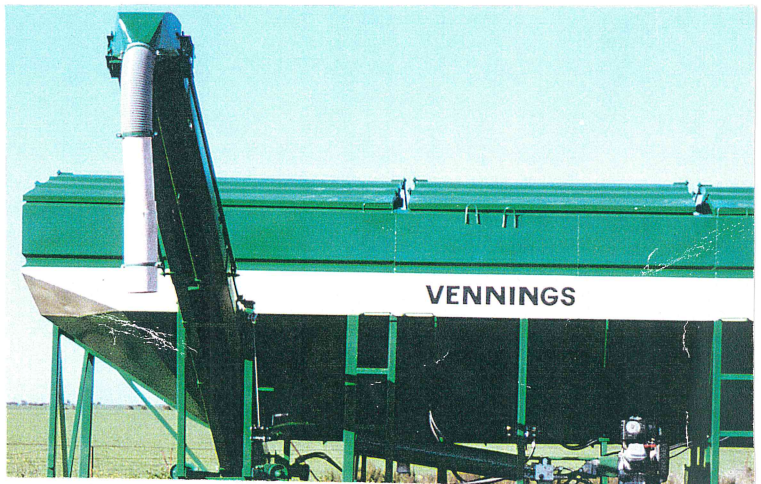

SPECIFICATIONS

| | | | | | |
|----------|-----------|-------------|-----------------------------|--------|----------------|
| Capacity | Super | 6.5 Tonne | Dimensions | Length | 20'8" (6300mm) |
| | Grain | 189 Bushels | | Width | 7'11" (2400mm) |
| | Urea | 4.5 Tonne | | Height | 7' 2" (2200mm) |
| | Tube Size | 8" (200mm) | Folded Height | | 9' (2750mm) |
| | Belt Size | 12" (300mm) | Height Under Discharge Head | | 6'10" (2080mm) |

MANUFACTURED AND DISTRIBUTED BY

VENNINGS

40 MOONTA ROAD, KADINA S.A. 5554

PHONE: (08) 8821 1196

FAX: (08) 8821 2774

The manufacturer reserves the right to change specifications without notice or incurring obligation. Information contained herein is from data available at time of printing. Photo for illustration purposes only. All quoted capacities are nominal.